



Commercial CCS-47 High Power Transfer DC-12GHz Failsafe

The Type CCS-47 is a long life, high performance transfer or crossover switch designed for use in 50 Ohms coaxial transmission lines. The switch is available with either failsafe or latching type actuation operating from a variety of voltage supplies. The primary advantage of this switch over the miniature versions shown on previous pages, is the higher power handling capability.

Specifications

RF Contacts: Break before make

Actuator	Voltage (VDC) 20°C	12	15	28
	Current (mA)	600	480	250

Switching Time: 30 msec max

Connectors: N-Type (f), TNC (f)(max frequency 11GHz only) or SMA(f)

Weight: 6 oz. max

Temperature Range: -40°C to +65°C (Operating)


Shock: MIL-STD-202 Method 213, Condition D (500G Non Operating)

Vibration: MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)

Humidity: Moisture Seal Available

Typical Contact Life: 5 Million Cycles



RF Power Handling:

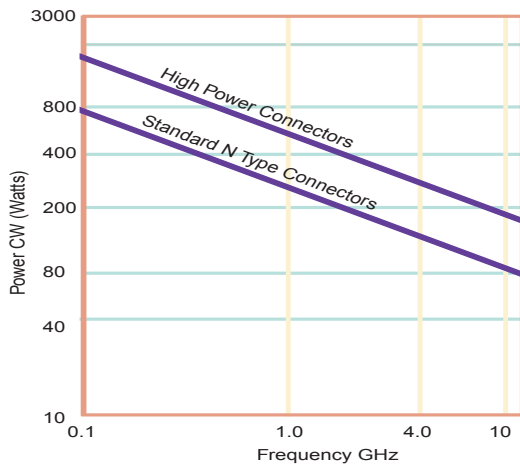

Specifications

	DC-1 GHz	1-4 GHz	4-12 GHz
VSWR (max)	1.25:1	1.40:1	1.80:1
Insertion Loss (max)	0.30 dB	0.40 dB	0.50 dB
Isolation (min)	70.0 dB	60.0 dB	60.0 dB

Typical Performance

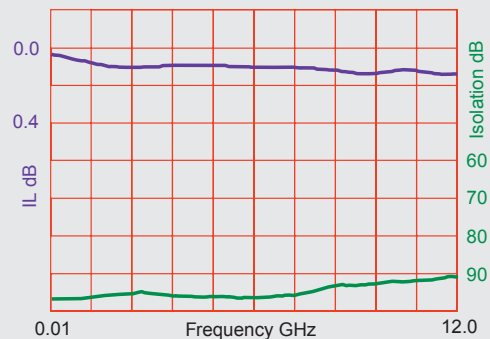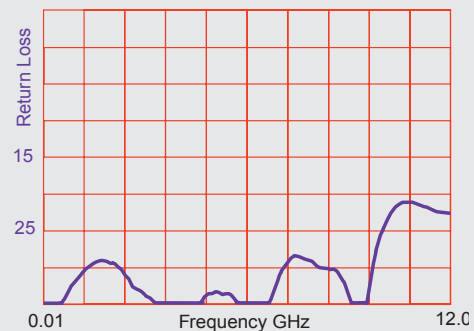

Specifications subject to change without notice.

www.teledynecoax.com
email: coax@teledyne.com

Tel: (800) 351-7368

10/2007

